


Performance & Equipment Specifications *

Nominal Flow Rate	0 – 2 MGD 0 – 5,257 lpm	NSF Certified	NSF/ANSI/CAN 61-372
Duty	>99%	Wetted Material	Stainless Steel
Automatic Turndown	0-100% Flow & Power	Fe Maintenance	Automatic
Permeate Loss	0%	TMP Normal	0-15 PSI, 0-1 Bar
Operating Modes	Demand Flow	Gasket Material	Viton Or EPDM
Membrane Life	25 Years	NEC	NFPA70, NFPA79 NFPA496, UL508A
Lamp Life	3 Years	Air Compressor	TBD

*May vary with each application



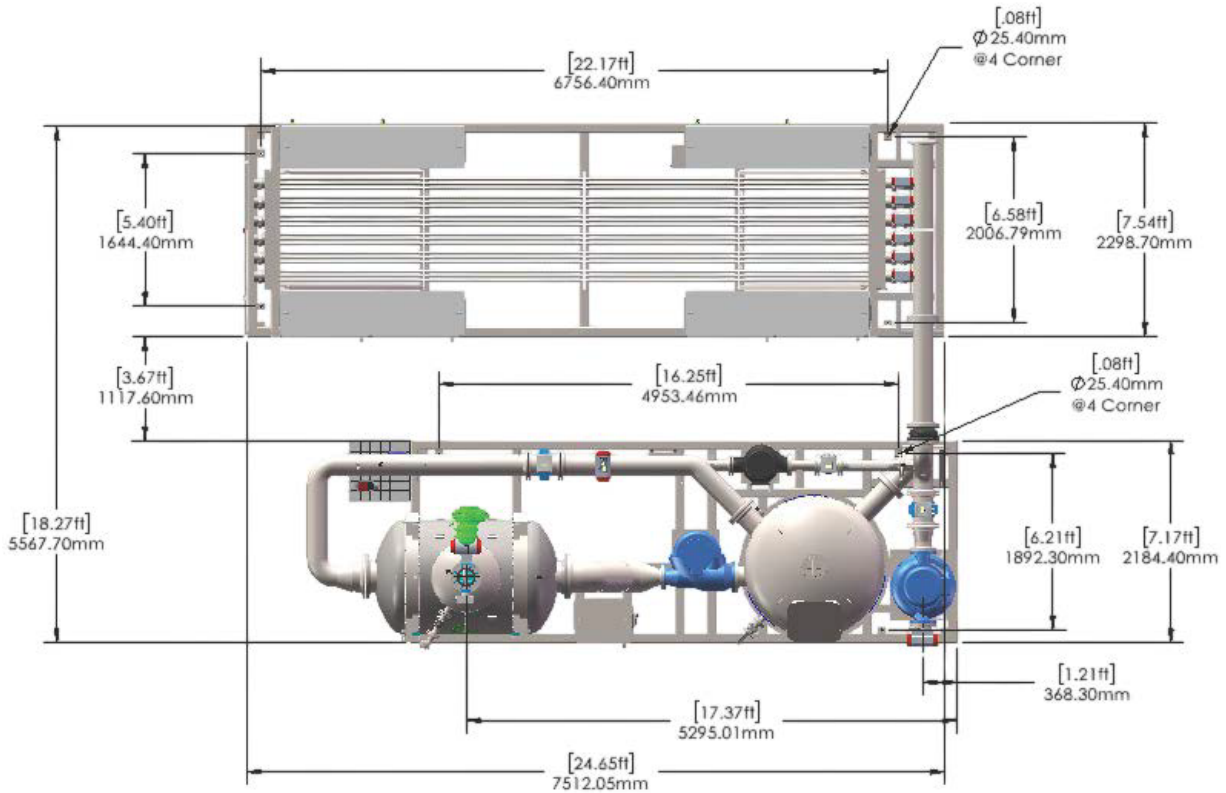

Application Engineering Data	
Power	480 Volt, 3Ø, 60Hz*
Network	Profinet
Instrument Air	Air Supply
Weight	45,000/50,500 LBS
Dry/Wet	20,400/22,700 KG

Connections	
Inlet Flange	6" 150#
Outlet Flange	6" 150#
Air Supply	3/4" NPT
Remote	Static IP/VPN

