



Nominal Capacity


0.08 MGD @ 250 GFD

0.3 MLD @ 425 LMH

TYPICAL SYSTEM DETAILS			
Duty	>99%	Control	Fully Automated with Remote
Turndown	0-100% Automatic	Membrane Life	No End of Life
Filtrate Loss	0% ZLD	Wetted Material	Stainless Steel/FRP
Operating Modes	Continuous on Demand	Compliance	NSF/ANSI/CAN 61-372
Feed Modes	Pressurized or Gravity	Gasket Material	Viton or EPDM
Power	480 Volt, 60Hz 10 FLA and other	Electrical Codes	NFPA70, NFPA79 NFPA496, UL508A
Network	PROFINET	Inlet	Configurable 150# Flange
Instrument Air	Oil Free 120 PSI, 8 Bar	Outlet	Configurable 150# Flange No PVC
Weight Dry/Wet	2,200/3,300 LBS 1,000/1,500 KG	Concentrate/<i>SRU</i> Discharge	Configurable 150 #Flange

Obtain Equipment Drawings for Application Engineering & Detail Design.



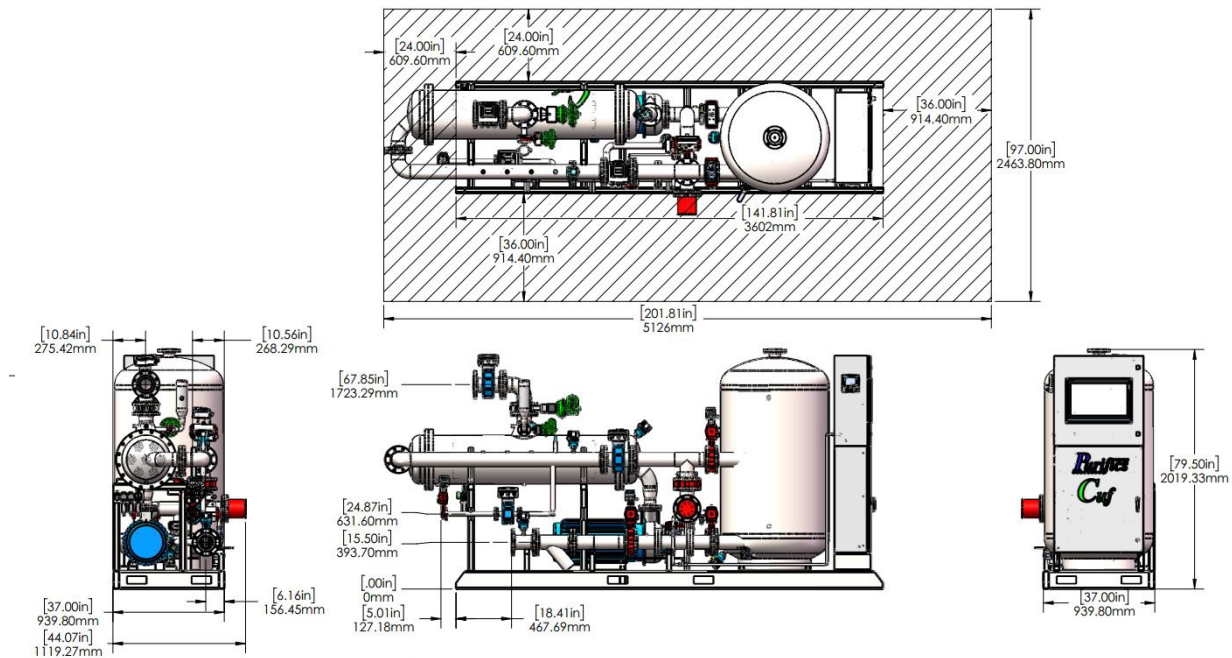

OPTIONS			
Break Tank	Secondary Disinfection	DO Addition – Metals Removal	Strainers / Screens
Inline pH Control	Level & Flow Control	Coagulant Feed – DOC Removal	Transfer & Blending
Inline Oxidation	Feed Pump	Camera	Direct & Indirect Integrity Test
Chlorine Resistant	-	ZLD	Solids Recovery