



### Flux vs Capacity \*

FLUX LMH (GFD)	M4 l/m (GPM)	DM4 l/m (GPM)
358 (423)	4 (1.05)	8 (2.11)


### Performance & Equipment Specifications \*

Duty	>99%	Membrane Life	25 Years
Automatic Turndown	0-100% Flow & Power	Wetted Material	Stainless Steel
Permeate Loss	0%	TMP Suction Range	0-15 PSI, 0-1 Bar
Operating Modes	Demand Flow	Gasket Material	Viton Or EPDM
Filtration Mode	Outside In	NEC	NFPA70, NFPA79 NFPA496, UL508A
Concentrate	~ 20% Solids	Remote	Internet / WiFi

May vary with each application \*

\*

# DeWRS M4 Platform

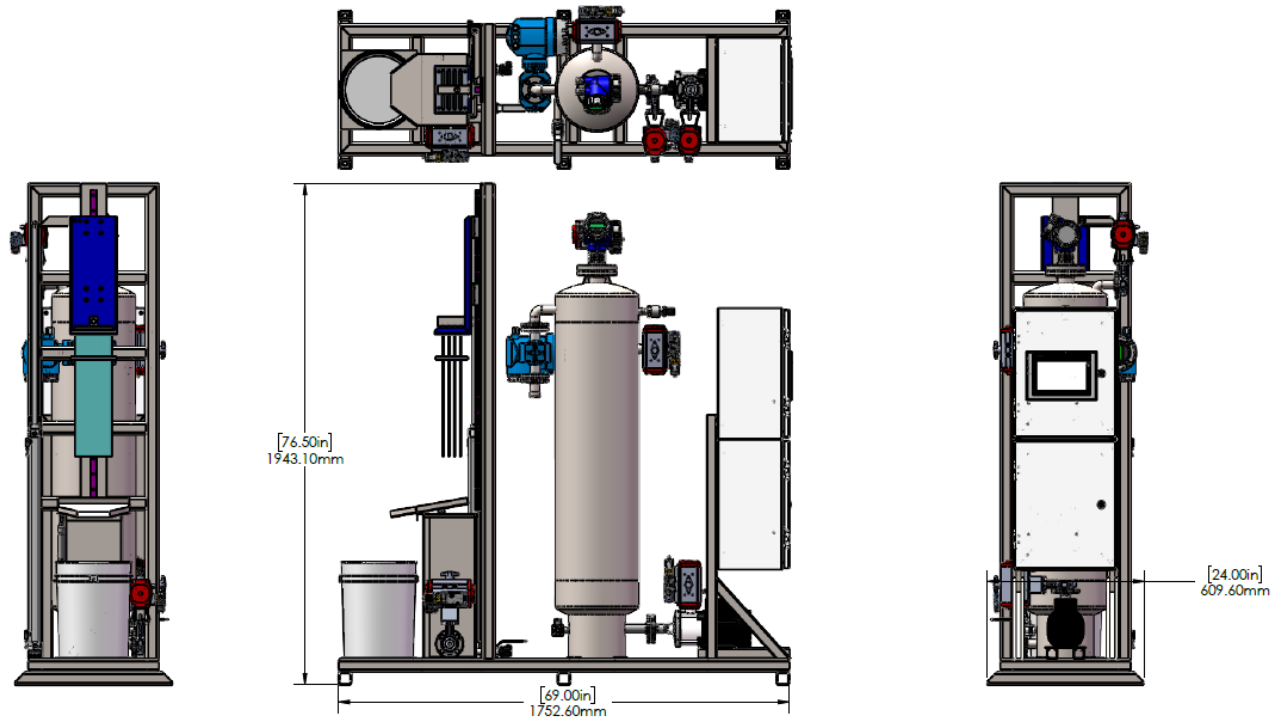

## Application Engineering Data

Power	480 Volt, 3Ø, 50/60Hz 6 FLA std (other options avail)	Inlet	1" #150 Flange
Network	Profinet	Outlet	1" #150 Flange
Instrument Air	1 cfm Oil Free 100 PSI, 6 Bar	Sludge	Tray
Weight Dry/Wet	550 lbs	Air Supply	1/2" NPT

## Auxiliary Options\*

<ul style="list-style-type: none"> <li>• Drive &amp; Control Pumps</li> </ul>	<ul style="list-style-type: none"> <li>• Conveyor Size</li> </ul>	<ul style="list-style-type: none"> <li>• Camera</li> </ul>	<ul style="list-style-type: none"> <li>• Transfer &amp; Blending</li> </ul>
<ul style="list-style-type: none"> <li>• Inline pH Control</li> </ul>	<ul style="list-style-type: none"> <li>• Level &amp; Flow Control</li> </ul>	<ul style="list-style-type: none"> <li>• Auger</li> </ul>	<ul style="list-style-type: none"> <li>• Hopper</li> </ul>



340 Sovereign Road, London, ON, Canada, N6M 1A8  
Ph: 519-473 5788, info@Purifics.com, www.Purifics.com

Protected by US & Foreign patents & patents pending. Purifics, Photo-Cat, *Cuf*, FDR, DeWRS and AOP+ are registered trademarks.