




Performance & Equipment Specifications *

Nominal Flow Rate	0 – 350 GPM 0 – 1,324 lpm	Certified / Compliant	NSF/ANSI/CAN 61-372
Duty	>99%	Wetted Material	Stainless Steel
Automatic Turndown	0-100% Flow & Power	Fe Maintenance	Automatic
Permeate Loss	0%	TMP Normal	0-15 PSI, 0-1 Bar
Operating Modes	Demand Flow	Gasket Material	Viton Or EPDM
Membrane Life	25 Years	NEC	NFPA70, NFPA79 NFPA496, UL508A
Lamp Life	3 Years	Air Compressor	TBD

*May vary with each application



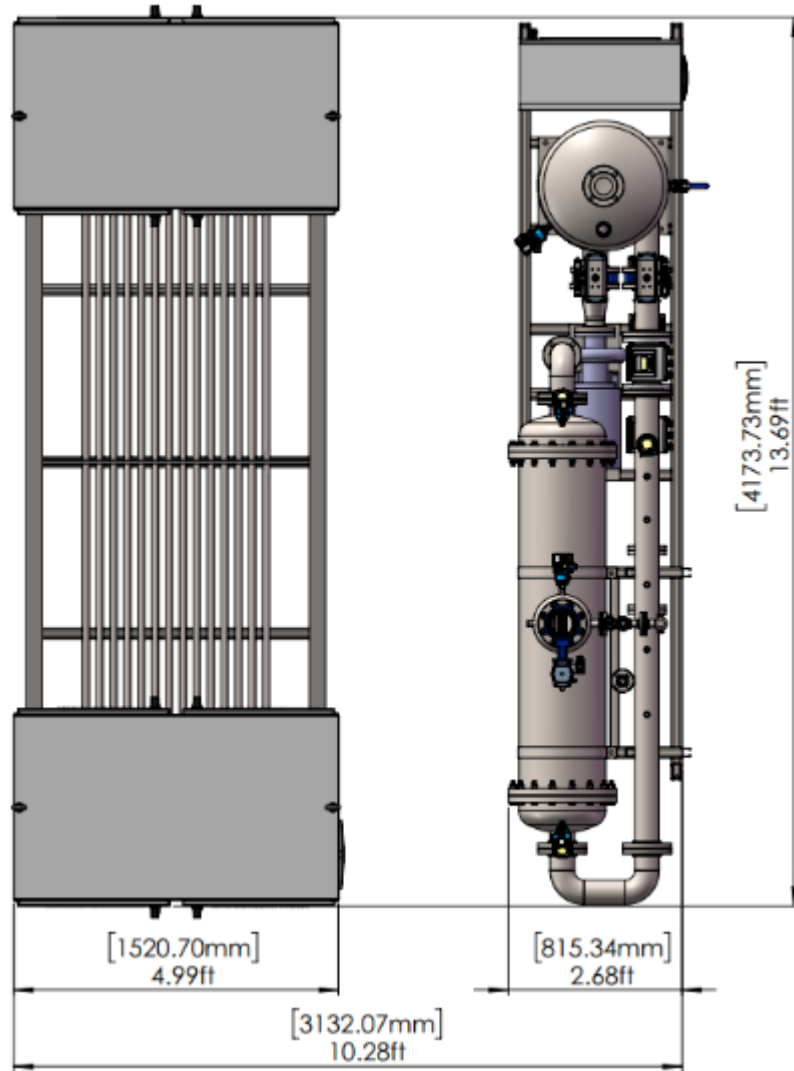

Application Engineering Data	
Power	480 Volt, 3Ø, 60Hz*
Network	Profinet
Instrument Air	3 cfm Oil Free 120 PSI, 8 Bar
Weight Dry/Wet	15,000/17,500 LBS 6,800/7,900 KG

Connections	
Inlet Flange	4" 150#
Outlet Flange	4" 150#
Air Supply	1" NPT
Remote	Static IP/VPN

