




Equipment Specifications *			
Automatic Turndown	0-100% Flow	Wetted Material	Stainless Steel
Capacity	18gpm (68 L/Min)	TMP Suction Range	0-15 PSI (0-1 Bar)
Operating Modes	Demand Flow	Gasket Material	Viton Or EPDM
Filtration Mode	Outside In	NEC	NFPA70, NFPA79 NFPA496, UL508A
Solids*	125lbs/hr @ 20%	Remote	Internet / WiFi
Application Engineering Data			
Power*	480 Volt, 3Ø, 50/60Hz 7 FLA std	Inlet	2" 150# Flange
Network	Profinet	Outlet	2" 150# Flange
Instrument Air	1 cfm Oil Free 100 PSI (6 Bar)	Air Supply	1/2" NPT
Weight Dry/Wet	2,500/6,000 lbs 1,133/2,720 kg	Conveyor Outreach	2' Standard 4' Optional

*May vary with each application



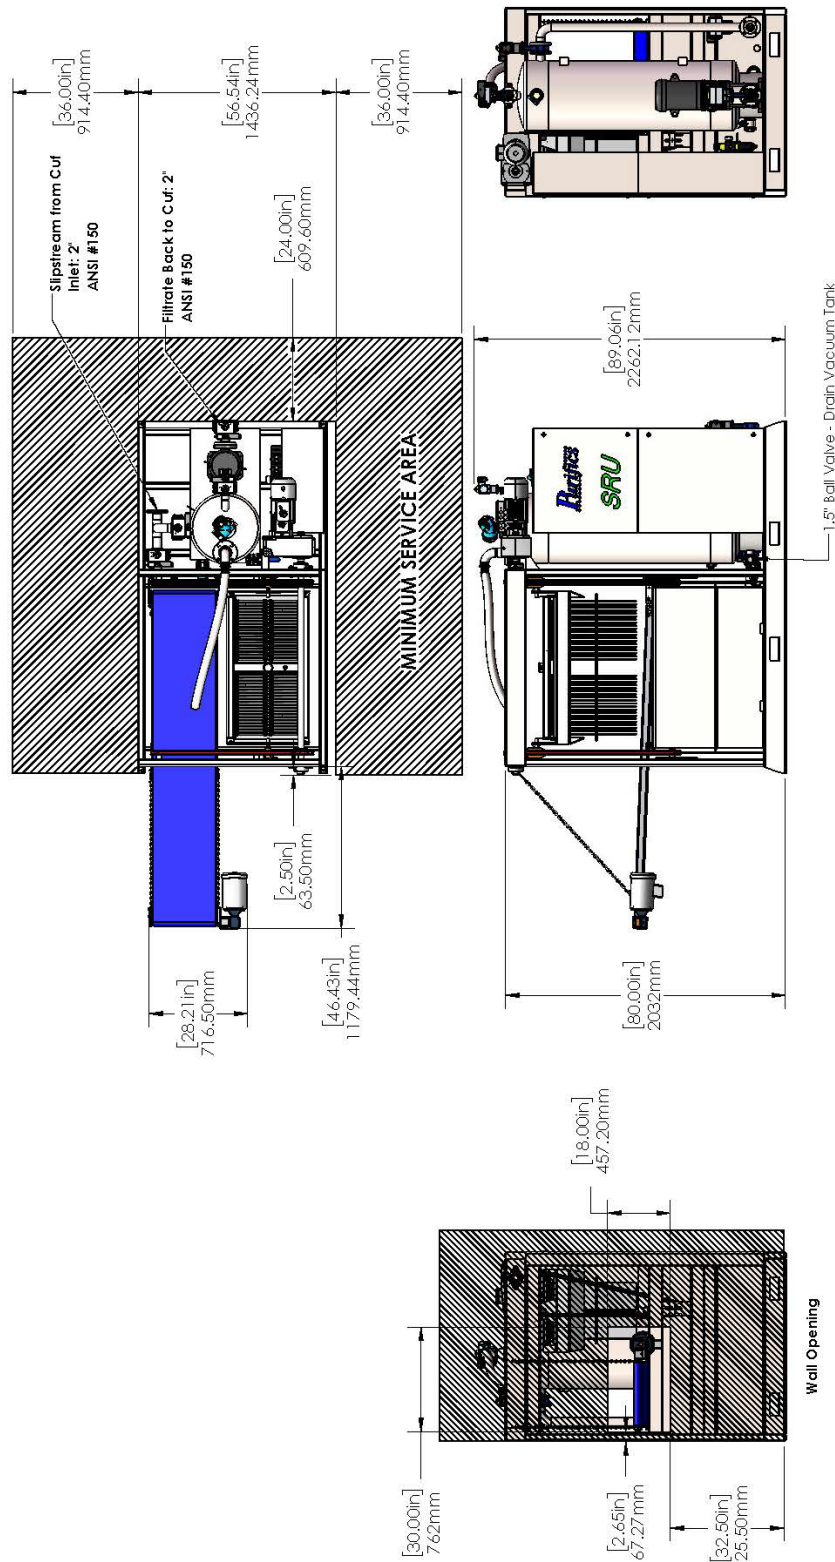

© 2025 by Puriflix Water, Inc

